

Curved Top AV Lecterns

with Pull-out Shelf & Trolley



Model Number Structure

| <u>Series</u> | <u>Type</u> | <u>Size</u> | <u>Modesty Combination for</u> | <u>Visual Display Option</u> |
|--------------------------------|-----------------------------|-------------|---|--|
| 67 | LC | 305441 | LM | TE0728NK |
| 67=Lectern with Pull-out Shelf | LP= Lectern with Curved Top | D x W x H | <u>Laminate modesty</u> LM=Laminate modesty <u>Perforated Metal modesty</u> MM=Metal modesty | TE0724NK=Trolley™ E & NOVA Keyboard Drawer TE0728NK=Trolley™ EXL & NOVA Keyboard Drawer |



(217) 342-7070

www.novadesk.com

sales@novasolutionsinc.com

Curved Top AV Lecterns

1. Select model number

Ex: 67-LP305441LM
(30x54x41 Curved Top AV Lectern with Pull-out Shelf & laminate modesty)

2. Select laminate color for base and worksurface


If ordering with perforated metal modesty, select metal color

Note: Laminate modesty will match base color.

Ex: 567 567
Base Worksurface

Optional Selections:

3. Select Visual Display Options (see page 34) Ex: TE0728NK (The Trolley™ EXL with NOVA keyboard drawer)



20 RU rack rails

| D x W x H (in.) | ft ³ / lbs | Model |
|---------------------------------|-----------------------|---------------|
| Laminate Modesty | | |
| 30 x 48/54* x 41 | 48.7 / 526 | 67-LC305441LM |
| 36 x 48/54* x 41 | 57.9 / 586 | 67-LC365441LM |
| Perforated Metal Modesty | | |
| 30 x 48/54* x 41 | 48.7 / 526 | 67-LC305441MM |
| 36 x 48/54* x 41 | 57.9 / 586 | 67-LC365441MM |


*Chassis width / Top width

Pull-out shelf Interior Dimensions:

30" D Lecterns: 22 1/4" D x 20 3/8" W x 7 3/4" H
36" D Lecterns: 28 1/4" D x 20 3/8" W x 7 3/4" H

Storage Dimensions:

48" W Unit: Left compartment w/ rack rails - 25 3/4" W. Right compartment w/ rack rails - 19 1/4" W



The Trolley™

- Ships installed in assembled units only. Maximum distance from center of
- wall mount VESA plate to bottom of monitor is 6 3/4" (171mm)

The Trolley™ EXL Maximum Dimensions for

Widescreen:
2 1/2" D x 22 7/8" W x 14 1/2" H up to
24" widescreen
36" min. worksurface width

The Trolley™ E Maximum Dimensions for

Widescreen:
2 1/2" D x 18 1/4" W x 14 1/2" H up to
20" widescreen

Model Wt(lbs) Description

With NOVA Keyboard Drawer

NOVA Keyboard Drawer installed in assembled units only.

International Customers: The Trolley™ includes Universal Power Control Units, compatible with all power requirements inside and outside the U.S.

TE0724NK 48 Trolley™ E & NOVA Keyboard Drawer

TE0728NK 48 Trolley™ EXL & NOVA Keyboard Drawer

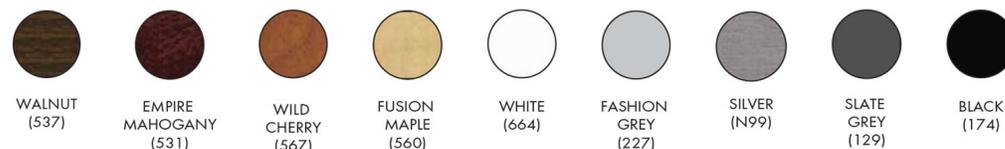
Available with NOVALinked™

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 20 Rack Units
- Ships Fully Assembled (Casters Field Installed)
- Privacy Sides

Color Options


Base Color Options



Worksurface Color Options



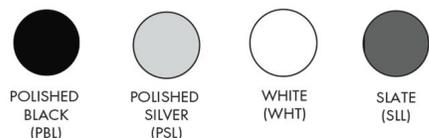
Metallic Color Options (for Metal Modesty)









Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order

| | Dimensions (in.) | Model |
|---|---|----------------|
| NOVA Keyboard Drawer  | Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen 24" - 34" wide | NK |
| Rectangular Wire Grommet  | Rectangular black plastic grommet cover is removable for easy wire management 1 7/8" D x 3 1/4" W | WG1080 |
| Star Cut Wire Grommet  | Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through 2 3/4" Diameter | RWGSC |
| Pop-up Power Center  | Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W | 11225PP |
| Pop-up Power / Data Center  | One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W | 11225PD |
| Pop-up Power / USB Charging Center  | One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. 3 3/4" D x 5" W | 11225PC |
| Round Flush Power Center  | Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed. 4" Diameter | 3359PP |
| Round Flush Power / USB Charging Center  | One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed. 4" Diameter | 3359PC |
| Round Power Center  | One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed. 2" Diameter | 3825P |

Options for Lecterns

| | D x W x H (in.) | ft ³ / lbs | Model | List Price |
|--|---|-----------------------|---------------------|------------|
| Flip-up Shelf  | Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement. | | | |
| | For 21" D or 24" D Lectern: Attaches to the LEFT side panel of Lectern 20 x 20 x 1 0.9 / 24 66-SH202001L Attaches to the RIGHT side panel of Lectern | | | |
| For 26" D, 30" D or 36" D Lectern: Attaches to the LEFT side panel of Lecterns 22 x 20 x 1 1.0 / 24 66-SH222001L Attaches to the RIGHT side panel of Lecterns 22 x 20 x 1 1.0 / 24 66-SH222001R | | | | |
| 2 Space Rack Drawer  | Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity. | | | |
| | 20 x 15 x 3 ½ | 10.4 / 20 | 66-2DRAWER | |
| Sliding Shelf  | Attaches to rack rails. 35 lb. weight capacity. | | | |
| | 20 x 15 x 1 | 10.4 / 15 | 66-SSHELF | |
| 2 Space Rack Shelf  | Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity. | | | |
| | 20 x 15 x 3 ½ | 10.4 / 15 | 66-2SHELF | |
| Removable Console  | Black laminate box (Customer to provide cutouts needed) | | | |
| | 11 x 15 x 6 | 2.0 / 20 | 66-CONSOLE01 | |
| Ventilation Fan  | 115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern. | | | |
| | 1 x 6 x 6 | 2.0 / 3 | 66-FAN | |
| Rack Cube  | All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. Complete Model number replacing blank " _ " with desired RU (Ex: 66-RRCUBE10 – 10 RU Rack Cube). NOTE: If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-RR) | | | |
| | 19 1/8 x 19 ½ x Varies | | 66-RRCUBE_ | |