

Curved Top AV Lecterns

with Trolley



Model Number Structure

66 - LC

304241

LM

TE0728NK

Series

Type

Size

Modesty Combination for

Visual Display Option

66=Lectern

LP= Lectern
with Curved
Top

D x W x H

Laminate modesty
LM=Laminate modesty
Perforated Metal modesty
MM=Metal modesty

TE0724NK=Trolley™ E & NOVA
Keyboard Drawer
TE0728NK=Trolley™ EXL & NOVA
Keyboard Drawer



(217) 342-7070

www.novadesk.com

sales@novasolutionsinc.com

Curved Top AV Lecterns

1. Select model number

Ex: 66-LC303641LM
(30x42x41 Curved Top AV Lectern with laminate modesty)

2. Select laminate color for base and worksurface

If ordering with perforated metal modesty, select metal color

Note: Laminate modesty will match base color.


Ex: 567 567
Base Worksurface

Optional Selections:

3. Select Visual Display Options (see page 34) Ex: TE0728NK (The Trolley™ EXL with NOVA keyboard drawer)

Available with most Visual Display Options

(30" W lecterns are not available with Trolley™ EXL or 21x24 Downview™)




14 RU rack rails

D x W x H (in.)	ft ³ / lbs	Model
Laminate Modesty		
14 RU rack rails. 1 Power strip		
30 x 30/36* x 41	33.1 / 404	66-LC303641LM
30 x 36/42* x 41	38.3 / 434	66-LC304241LM
36 x 30/36* x 41	39.1 / 435	66-LC363641LM
36 x 36/42* x 41	45.5 / 505	66-LC364241LM
Perforated Metal Modesty		
14 RU rack rails. 1 Power strip		
30 x 30/36* x 41	33.1 / 404	66-LC303641MM
30 x 36/42* x 41	38.3 / 434	66-LC304241MM
36 x 30/36* x 41	39.1 / 435	66-LC363641MM
36 x 36/42* x 41	45.5 / 505	66-LC364241MM

*Chassis width / Top width

30" W Unit: Rack rails on left side of storage area - 19 1/4" W. Remaining space is 8 5/8" W
36" W Unit: Left compartment - 13 5/8" W. Right compartment w/ rack rails - 19 1/4" W



The Trolley™

- Ships installed in assembled units only. Maximum distance from center of
- wall mount VESA plate to bottom of monitor is 6 3/4" (171mm)

The Trolley™ Maximum Dimensions for

Widescreen:
2 1/2" D x 18 1/4" W x 14 1/2" H up to
20" widescreen

The Trolley™ EXL Maximum Dimensions for

Widescreen:
2 1/2" D x 22 7/8" W x 14 1/2" H up to
24" widescreen
36" min. worksurface width

Model Wt(lbs) Description

With NOVA Keyboard Drawer

NOVA Keyboard Drawer installed in assembled units only.

International Customers: The Trolley™ includes Universal Power Control Units, compatible with all power requirements inside and outside the U.S.

TE0724NK	48	Trolley™ E & NOVA Keyboard Drawer
TE0728NK	48	Trolley™ EXL & NOVA Keyboard Drawer

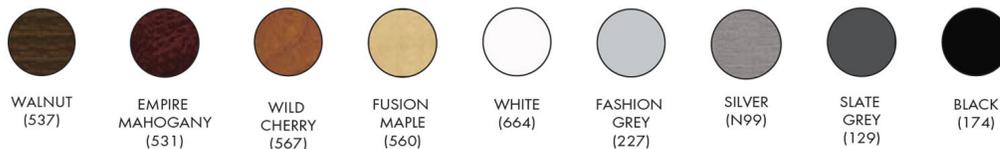
Available with NOVA Linked™

Standard Features

- iMod™ wire management
- Locking Front Access Doors
- Heavy Duty Locking Casters
- Powerstrip
- Laminate or metal modesty panel
- 14 Rack Units
- Ships Fully Assembled (Casters Field Installed)

Color Options


Base Color Options



Worksurface Color Options



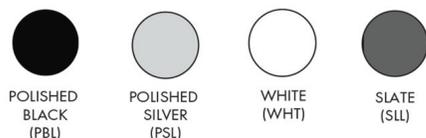
Metallic Color Options (for Metal Modesty)









Options & Accessories

Factory Installed Accessories

Must specify location of grommet / power center at time of order

	Dimensions (in.)	Model
NOVA Keyboard Drawer 	Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen 24" - 34" wide	NK
Rectangular Wire Grommet 	Rectangular black plastic grommet cover is removable for easy wire management 1 7/8" D x 3 1/4" W	WG1080
Star Cut Wire Grommet 	Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through 2 3/4" Diameter	RWGSC
Pop-up Power Center 	Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PP
Pop-up Power / Data Center 	One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed. 3 3/4" D x 5" W	11225PD
Pop-up Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed. 3 3/4" D x 5" W	11225PC
Round Flush Power Center 	Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed. 4" Diameter	3359PP
Round Flush Power / USB Charging Center 	One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed. 4" Diameter	3359PC
Round Power Center 	One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed. 2" Diameter	3825P

Options for Lecterns

	D x W x H (in.)	ft ³ / lbs	Model	List Price	
Flip-up Shelf 	Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.				
	For 21" D or 24" D Lectern:				
	Attaches to the LEFT side panel of Lectern	20 x 20 x 1	0.9 / 24	66-SH202001L	
	Attaches to the RIGHT side panel of Lectern				
2 Space Rack Drawer 	Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.				
		20 x 15 x 3 ½	10.4 / 20	66-2DRAWER	
	Attaches to the LEFT side panel of Lecterns				
	Attaches to the RIGHT side panel of Lecterns				
Sliding Shelf 	Attaches to rack rails. 35 lb. weight capacity.				
		20 x 15 x 1	10.4 / 15	66-SSHELF	
	Attaches to the LEFT side panel of Lecterns				
	Attaches to the RIGHT side panel of Lecterns				
2 Space Rack Shelf 	Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.				
		20 x 15 x 3 ½	10.4 / 15	66-2SHELF	
	Attaches to the LEFT side panel of Lecterns				
	Attaches to the RIGHT side panel of Lecterns				
Removable Console 	Black laminate box (Customer to provide cutouts needed)				
		11 x 15 x 6	2.0 / 20	66-CONSOLE01	
	Attaches to the LEFT side panel of Lecterns				
	Attaches to the RIGHT side panel of Lecterns				
Ventilation Fan 	115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.				
		1 x 6 x 6	2.0 / 3	66-FAN	
	Attaches to the LEFT side panel of Lecterns				
	Attaches to the RIGHT side panel of Lecterns				
Rack Cube 	All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. Complete Model number replacing blank "___" with desired RU (Ex: 66-RRCUBE10 - 10 RU Rack Cube). NOTE: If ordering with a lectern, specify "-RR" at end of lectern model number. (Ex: 66-LP303047LM-RR)				
		19 1/8 x 19 ½ x Varies		66-RRCUBE___	
	Attaches to the LEFT side panel of Lecterns				
	Attaches to the RIGHT side panel of Lecterns				