Lecterns & Podiums Standard

Sit-Stand Podium








Top Features

Shown with optional rack rail cabinet

- ADA Compliant
- iMod[™] wire management compartment with locking and removable modesty panel to conceal wires.
- Electrically adjustable from 30" base height with 12" travel.
- Multi-plug Powerstrip Included in iModTM
- Thermofused Melamine worksurface & base.
- Manufactured with recycled post industrial materials.
- Flat PVC edgebanding with matching colors.
- Ships Assembled
- Proudly made in the ${f USA}$

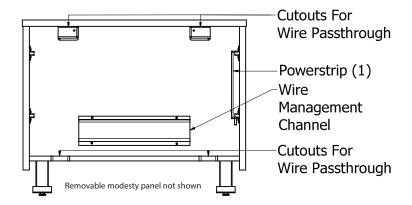


Also Available with these Visual Display Options





Model Number Structure




SIT-STAND PODIUMS



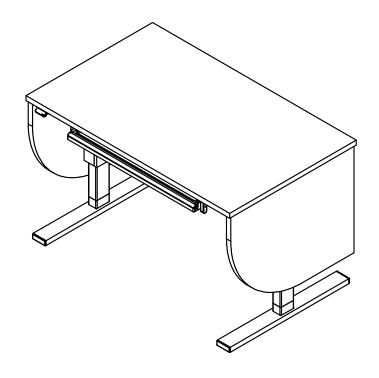





FRONT (SEATED HEIGHT)



(SEATED HEIGHT)



FRONT (STANDING HEIGHT)





RIGHT SIDE (STANDING HEIGHT)


SIT-STAND PODIUMS

68-PS243830

24"D x 38"W x 30"H










68-PS244230

24"D x 42"W x 30"H










68-PS244830

24"D x 48"W x 30"H










SIT-STAND PODIUMS

68-PS303830

30"D x 38"W x 30"H










68-PS304230

30"D x 42"W x 30"H










68-PS304830

30"D x 48"W x 30"H









SIT-STAND PODIUM TECH OPTIONS


NOVA KEYBOARD




21"x24" DOWNVIEW




SURFACE MOUNT ARM




ARTICULATING SURFACE MOUNT ARM





24" TROLLEY




AV RACK RAIL CABINETS












AV RACK RAIL CABINETS

68-RC242230

24"D x 22"W x 30"H










68-RC242242

24"D x 22"W x 42"H










AV RACK RAIL CABINETS

68-RC302230

30"D x 22"W x 30"H










68-RC302242


30"D x 22"W x 42"H










SIT-STAND PODIUMS W/ AV RACK RAIL CABINETS (LEFT)

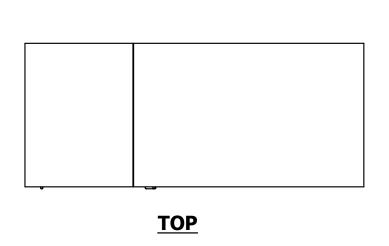

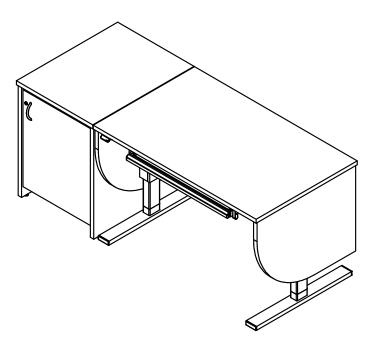


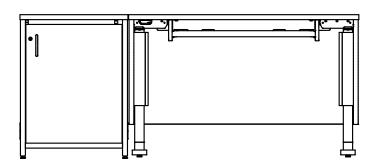




FRONT (SEATED HEIGHT)

RIGHT SIDE (SEATED HEIGHT)

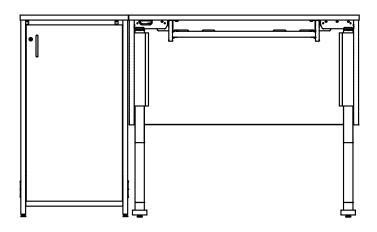




FRONT (STANDING HEIGHT)

RIGHT SIDE (STANDING HEIGHT)

SIT-STAND PODIUMS W/ AV RACK RAIL CABINETS (RIGHT)

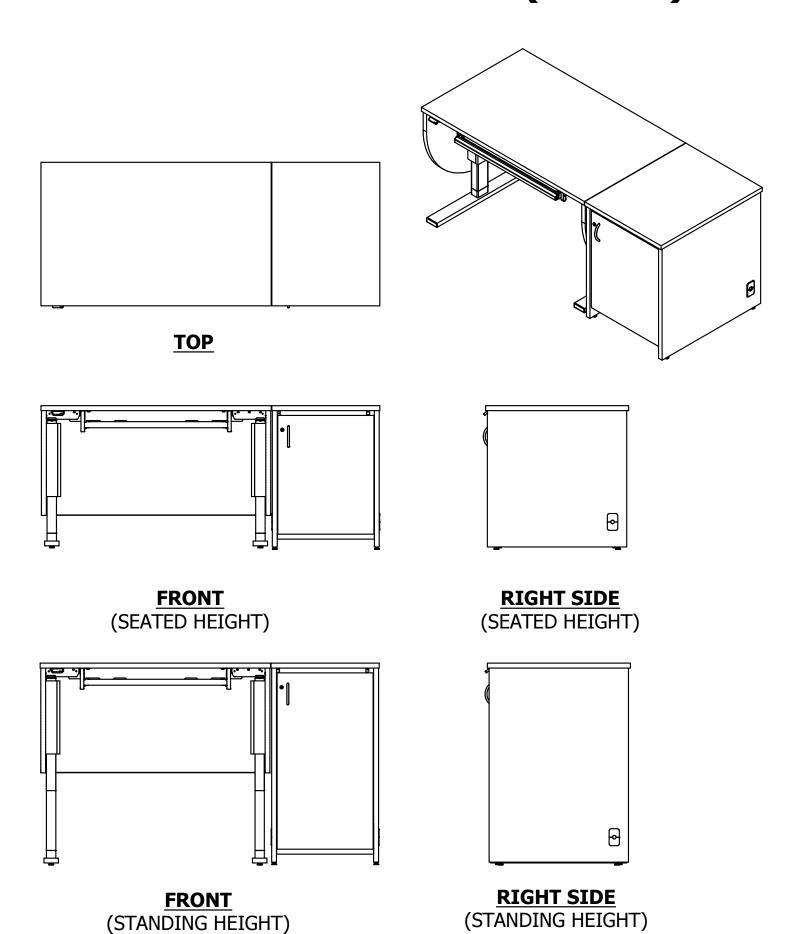



Visual Display Options

Adding a Downview™ or Trolley™ Visual Display Option may affect CPU storage width or available RUs



The Trolley™

- Ships installed in assembled units only.
- Maximum distance from center of wall mount VESA plate to bottom of monitor is 6 3/4" (171mm)

Wt(lbs) Description

With NOVA Keyboard Drawer

NOVA Keyboard Drawer installed in assembled units only.

International Customers: The Trolley™ includes Universal Power Control Units, compatible with all power requirements inside and outside the U.S.

TE0724NK	48	Trolley™ E & NOVA Keyboard Drawer

TE0728NK Trolley™ EXL & NOVA Keyboard Drawer

The Trolley™ E

Maximum Dimensions for

2 1/2" D x 18 1/8" W x 14 1/2" H up to 20" widescreen

The Trolley™ EXL

Maximum Dimensions for Widescreen:

2 ½" D x 22 %"W x 14 ½"H up to 24" widescreen 36" min. worksurface width

- Patented Access door automatically opens and closes with the push of a
- Low voltage electrical motor to lift & lower monitor
- Intelligent Motion Technology™ provides operational intuition





Downview™

· Ships installed in assembled units only.

16" D x 21" W viewport (Widescreen) **Maximum Dimensions for** Widescreen: 20 1/8" W x 12 1/2" H up to 21" widescreen

24" min. worksurface depth

18" D x 21" W viewport (Widescreen) **Maximum Dimensions for** Widescreen: 20 1/8" W x 14 1/2" H up to 21" widescreen

26" min. worksurface depth

21" D x 24" W viewport (Widescreen) **Maximum Dimensions for** Widescreen: 23 1/8" W x 19" H up to 24" widescreen

30" min. worksurface depth 36" min. worksurface width

• Tinted, tempered glass viewport

- Keeps monitor under glass below worksurface
- · Ergonomic viewing angle

Model Wt(lbs) Description

With NOVA Keyboard Drawer

Downview™ & NOVA Keyboard Drawer installed in assembled units only. Optional Privacy/Glare visor sold separately.

FPA1621NK	35	16″ D x 21″ W Downview™ & NOVA Keyboard Drawer
-----------	----	--

FPA1821NK 18" D x 21" W Downview™ & NOVA Keyboard Drawer

FPA2124NK 39 21" D x 24" W Downview™ & NOVA Keyboard Drawer



Surface Mount Arm 👄

Installation required



Surface Mount Arm

Maximum Weight: 21 lbs Maximum Dimensions: Up to 24" widescreen

Articulating Surface Mount Arm Maximum Weight: 33 lbs Maximum Dimensions: Up to

- · Securely fastens monitor to worksurface
- · Height and tilt adjustable

Wt(lbs) Description Model

With NOVA Keyboard Drawer

NOVA Keyboard Drawer installed in assembled units only.

SMA0203NK 13 SMA & NOVA Keyboard Drawer

ASMA0203NK 22 **Articulating SMA & NOVA Keyboard Drawer**



Options & Accessories

Options for Lecterns

DxWxH(in.) ft³/lbs

List Price

Flip-up Shelf



Field installed on all but Sit-Stand Lecterns. Shipped Separately. Color matches worksurface of lectern ordered. Located 3" down from worksurface. For factory prep, must specify "U" on lectern model number for left-handed, or "V" on lectern model number for right-handed placement, or "B" on lectern model number for both left and right hand placement.

Model

For 21" D or 24" D Lectern:

Attaches to the LEFT side panel of Lectern

66-SH202001L 0.9/24Attaches to the RIGHT side panel of Lectern 66-SH202001R 20 x 20 x 1 0.9 / 24

For 26" D, 30" D or 36"D Lectern:

Attaches to the LEFT side panel of Lecterns

22 x 20 x 1 1.0 / 24 66-SH222001L Attaches to the RIGHT side panel of Lecterns 22 x 20 x 1 1.0 / 24 66-SH222001R

2 Space Rack

Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.

20 x 15 x 3 ½ 10.4 / 20 66-2DRAWER

Drawer



Sliding Shelf

Attaches to rack rails. 35 lb. weight capacity.



20 x 15 x 1 10.4 / 15 66-SSHELF

2 Space Rack Shelf



Attaches to rack rails. Takes up 2 RU space. 50 lb. weight capacity.

20 x 15 x 3 ½ 10.4 / 15 66-2SHELF

Removable Console

Black laminate box (Customer to provide cutouts needed) 11 x 15 x 6 2.0 / 20 66-CONSOLE01



Ventilation Fan 115V fan rated at 57 CFM. 30 dBA. Add (-VF) on lectern model number to be factory installed. Must also specify cutout location on lectern.

> 1 x 6 x 6 2.0/3 66-FAN

Rack Cube



All metal construction providing front and rear Rack Rails allowing rack storage mounting prior to installation in rack storage compartment. Standard Black metal. Available with 6 RU - 14 RU; height varies by RU count. Complete Model number replacing blank "__" with desired RU (Ex: 66-RRCUBE 10 – 10 RU Rack Cube). NOTE: If ordering with a lectern, specify "-RR" at end of

19 1/2 x Varies 66-RRCUBE_

Factory Installed Accessories

Must specify location of grommet / power center at time of order

Factory Installed

NOVA Keyboard Drawer

Keyboard length to fit desk ordered. Only ordered when NO Visual Display Option is chosen

Rectangular Wire Grommet

Rectangular black plastic grommet cover is removable for easy wire management

1 %" D x 3 ¼" W WG1080

Star Cut Wire Grommet

Round black plastic grommet with rubber star cut opening allows more cords and cables to pass through

2 ¾" Diameter

Dimensions (in.)

RWGSC

Pop-up Power Center

Two grounded outlets. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.

3 ¾" D x 5" W 11225PP

Pop-up Power/ Data Center



One grounded outlet. One opening for voice/data jack. Voice/Data Adapter Kit (included) provides adapters for couplers & jacks from a variety of manufacturers. Fluid one touch accessibility. 6ft, 15 Amp cord. UL listed.

3 ¾" D x 5" W

11225PD

Pop-up Power / USB Charging Center



One grounded outlet. One USB charging duplex. Fluid one touch accessibility. 6ft, 15 Amp cord. UL Listed.

3 ¾" D x 5" W

Round Flush Power Center Two grounded outlets. Clean, flush mount. 6ft, 15 Amp cord. UL listed.



4" Diameter 3359PP

Round Flush Power / USB **Charging Center**

One grounded outlet. One USB charging duplex. Clean, flush mount. 6ft, 15 Amp cord. UL Listed.

4" Diameter



Round Power Center

One grounded outlet. Features spill-proof technology. 6ft, 15 Amp cord. UL Listed.

2" Diameter